

## Duct Sensor Humidity / Temperature

For measuring the relative or absolute humidity and temperature in duct applications. The measured values are transmitted over Modbus. Instead of the humidity signal, the enthalpy or the dewpoint can be selected as an output signal. Nema 4X / IP65 rated enclosure.



## Type Overview

Type	Output Signal	Output signal active temperature	Output signal active humidity
22DTH-15M	Modbus	DC 0...5 V, DC 0...10 V	DC 0...5 V, DC 0...10 V

## Technical Data

<b>Electrical data</b>	Power Supply DC	15...24 V, $\pm 10\%$ , 0.7 W
	Power Supply AC	24 V, $\pm 10\%$ , 1.8 VA
	Cable entry	Cable gland M20 2 x $\varnothing 6$ mm, with strain relief 2 x $\varnothing 6$ mm
<b>Functional data</b>	Sensor Technology	Polymer capacitive sensor with stainless steel wire mesh filter
	Communicative control	Modbus RTU (Details see separate document "Sensor Modbus Register")
	Output signal active note	Output DC 0...5/10 V selectable with switch
	Media	Air
<b>Measuring data</b>	Measured values	Temperature Humidity Dew point Enthalpies Absolute humidity
	Measuring range humidity	0...100% rH selectable via Modbus
	Measuring range temperature	-35...90 °C [-30...195 °F] selectable via Modbus Attention: max. measuring temperature is restricted by max. medium temperature (see Safety data)
	Measuring range absolute humidity	0...80 g/m <sup>3</sup> selectable via Modbus
	Measuring range enthalpy	0...85 kJ/kg selectable via Modbus
	Measuring range dew point	-20...80 °C selectable via Modbus
	Accuracy humidity	$\pm 2\%$ between 10...90% r.H. @ 21 °C
	Accuracy temperature active	$\pm 0.5$ °C @ 25 °C
	Operating condition air flow	max. 12 m/s
	<b>Materials</b>	Cable gland
Housing		Cover: Lexan, Belimo orange NCS S0580-Y6OR Bottom: Lexan, Belimo orange NCS S0580-Y6OR Seal: 0467 NBR70, black

<b>Safety data</b>	Ambient humidity	85% r.H., non-condensing
	Ambient temperature	-35...50 °C [-30...120 °F]
	Medium temperature	-35...70 °C [-30...160 °F]
	Operating condition air flow	max. 12 m/s
	Protection class IEC/EN	III Safety Extra-Low Voltage (SELV)
	Protection class UL	UL Class 2 Supply
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-13
	Certification UL	pending
	Degree of protection IEC/EN	IP65
	Degree of protection NEMA/UL	NEMA 4X
	Quality Standard	ISO 9001
	Weight	0.22 kg

**Safety notes**


The installation and assembly of electrical equipment should only be performed by authorized personnel.

The product should only be used for the intended application. Unauthorised modifications are prohibited! The product must not be used in relation with any equipment that in case of a failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

**Remarks**
**Build-up of Self-Heating by Electrical Dissipative Power**

Temperature sensors with electronic components always have a dissipative power which affects the temperature measurement of the ambient air. The dissipation in active temperature sensors shows a linear increase with rising operating voltage. This dissipative power should be taken into account when measuring temperature. In case of a fixed operating voltage ( $\pm 0.2$  V) this is normally done by adding or reducing a constant offset value. As Belimo transducers work with a variable operating voltage, only one operating voltage can be taken into consideration, for reasons of production engineering. Transducers 0...10 V / 4...20 mA have a standard setting at an operating voltage of DC 24 V. That means, that at this voltage, the expected measuring error of the output signal will be the least. For other operating voltages, the offset error will be increased by a changing power loss of the sensor electronics. If a re-calibration should become necessary later directly on the sensor, this can be done by means of a trimming potentiometer on the sensor board.

**Application Notice for Humidity Sensors**


Refrain from touching the sensitive humidity sensor/element. Touching the sensitive surface will void warranty.

For standard environmental conditions the manufacturing accuracy specified in the datasheet will be covered by the calibration warranty for two years. When exposed to harsh environmental conditions such as; high ambient temperature and/or high levels of humidity or presence of aggressive gases (i.e. chlorine, ozone, ammonia) the sensor element may be affected and readings may be outside specified accuracy. Replacement of deteriorated humidity sensor due to harsh environmental conditions are not subject of the general warranty.

**Accessories**

<b>Scope of delivery</b>	Mounting flange	
	Cable Gland Nut PG11, Ø6...10 mm	
<b>Optional accessories</b>	Strain relief Ø6...8 mm	
	<b>Description</b>	<b>Type</b>
	Replacement filter Stainless steel, wire mesh	A-22D-A06

Wiring diagram

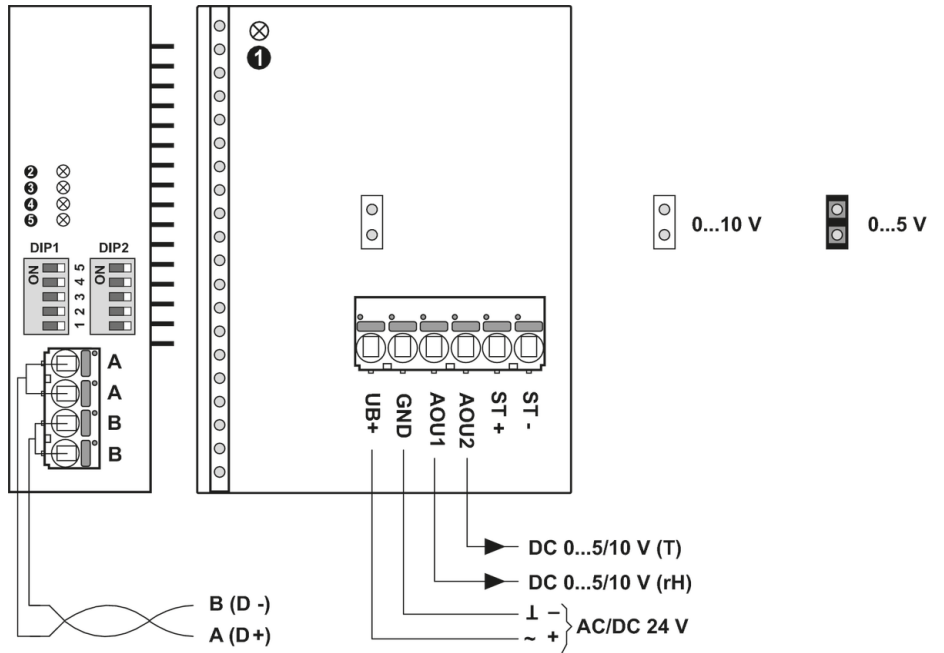

- ① and ⑤: Status LED
- ② red: Error
- ③ yellow: Tx
- ④ yellow: Rx

**Detailed documentation**

The separate document Sensor Modbus-Register informs about Modbus register, addressing, parity and bus termination (DIP1: address, DIP2: baud rate, parity, bus termination)

**Notes Wiring RS485**




Connection via safety isolating transformer.

Parallel connection of other actuators possible. Observe the performance data.

The wiring of the line for Modbus (RTU) / BACnet (MS/TP) is to be carried out in accordance with applicable RS485 regulations.

Modbus / BACnet: Supply and communication are not galvanically isolated. Connect earth signal of the devices with one another.

**Wiring RS485 (Modbus RTU & BACnet MS/TP)**

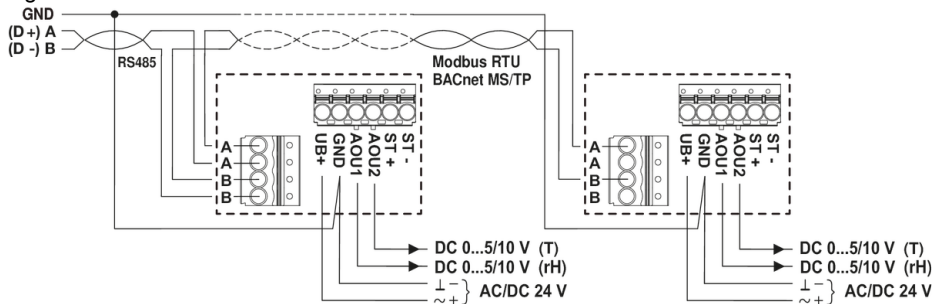

Dimensions

